

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
INTL-0134-US (P6499)

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

TIME SHIFTING BY SIMULTANEOUSLY RECORDING AND PLAYING A DATA STREAM

and invented by:

Dennis M. O'Connor, Mark P. Chuang, Thomas S. Martis, Mark L. Gordon and John J. Kirby

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 09/150,577

Which is a:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 08/996,535

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 35 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
INTL-0134-US (P6499)

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets 18
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL218151219US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
INTL-0134-US (P6499)

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):


Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	27	- 20 =	7	x \$18.00	\$126.00
Indep. Claims	4	- 3 =	1	x \$78.00	\$78.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$964.00

- ☒ A check in the amount of **\$964.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **20-1504** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: 12/30/98


Signature
Timothy N. Trop, Reg. No. 28,994
Trop, Pruner, Hu & Miles, P.C.
8554 Katy Freeway, Suite 100
Houston, TX 77024
(713) 468-8880 [Ph]
(713) 468-8883 [Fax]

cc:

APPLICATION

FOR

UNITED STATES LETTERS PATENT

TITLE: TIME SHIFTING BY SIMULTANEOUSLY
RECORDING AND PLAYING A DATA STREAM

APPLICANTS: DENNIS M. O'CONNOR, MARK P. CHUANG,
THOMAS S. MARTIS, MARK L. GORDON, and
JOHN J. KIRBY.

Express Mail No.: EL218151219US

Date: December 30, 1998

TIME SHIFTING BY SIMULTANEOUSLY RECORDING
AND PLAYING A DATA STREAM

Cross-Reference to Related Application

This is a continuation-in-part of U.S. patent application, serial no. 09/150,577, filed September 10,
5 1998, which is a continuation-in-part of U.S. Patent Application Serial No. 08/996,535, filed December 25, 1997.

Background

10 This present invention relates to the recording and playing back of a video stream. A video stream includes any combination of audio and/or video data streams.

Video streams have typically been recorded on analog media such as a video cassette. A video cassette recorder (VCR) is used to record the video stream on the video
15 cassette. The video stream may come via a broadcast signal, via cable, via satellite signal, or from another video playback device. Once the video stream has been recorded, the VCR is used to rewind the recording medium and play what was recorded. However, due to the nature of
20 the analog medium, once the VCR has started recording, it is not possible to play back the portion of the video stream that has already been recorded until the recording session is terminated.

Thus, there is a need for an improved way of recording
25 portions of a video transmission.

Summary

In accordance with one embodiment a method of displaying and recording a video transmission includes monitoring an ongoing video transmission for a
5 characteristic. Upon detecting the characteristic, the video transmission is automatically recorded while the video transmission is being displayed.

Description of the Drawings

10 Figure 1 is a block diagram of a video record and playback system in accordance with one embodiment of the invention;

Figure 2 is a flow chart of one embodiment of the method of providing a time-shifted video stream in
15 accordance with the invention;

Figure 3 shows one embodiment of performing block 206 of Figure 2;

Figure 4 shows one embodiment of an apparatus for storing the video stream on a hard disk in accordance with
20 the invention;

Figure 5 shows an embodiment of a method of using the storage unit as a temporary buffer in accordance with the invention.

Figure 6 is a flowchart of the playback of a video
25 stream catching up to the incoming video stream for one embodiment of the invention;

Figure 7 shows another embodiment, in which the user is able to suspend the display of the incoming video stream in accordance with the invention;

Figure 8 shows an example of an embodiment of a display screen with several image frames taken at different times in accordance with the invention;

5 Figure 9 is a flow chart showing one embodiment of a system for recording and playing back a video stream in accordance with the invention;

Figure 10 is a block diagram of a computer system useful in implementing one embodiment of the present invention;

10 Figure 11 is an exemplary TV display for implementing an embodiment of the present invention;

Figure 12 is a flow chart showing the operation of another embodiment of the present invention;

15 Figure 12A is a continuation of the flow chart of Figure 12.

Figure 13 is a top plan view of a remote control useful in one embodiment of the present invention;

20 Figure 14 is a block diagram showing how data is transferred to and from a memory device in accordance with one embodiment of the present invention;

Figure 15 is a flow chart showing the flow of input video information into a storage device in accordance with one embodiment of the present invention;

25 Figure 16 is a flow chart showing the flow of data from the storage device in accordance with one embodiment of the present invention;

Figure 17 shows a display with an electronic program guide in accordance with one embodiment of the present invention;

Figure 18 is a block diagram of a video transmission system in accordance with one embodiment of the present invention;

5 Figure 19 is a depiction of a screen display in accordance with the embodiment shown in Figure 18;

Figure 20 is a flow chart for one embodiment of software for implementing the system shown in Figure 18 in accordance with the invention; and

10 Figure 21 is a flow chart for one embodiment of software for implementing another aspect of the system shown in Figure 18 in accordance with the invention.

Detailed Description

15 Figure 1 shows a block diagram of a video record and playback system 100 in accordance with one embodiment of the invention. A video stream is received at the video input port 102. The video stream may be provided by a camera, a television signal, broadcast, cable, or satellite signals, or another video playback device. In one
20 embodiment, an analog-to-digital conversion may be performed on an analog video stream to form a digital video bit stream. In a different embodiment, the video is already in digital form. The video record and playback system 100 may be part of a system, such as a computer
25 system or set top box, such that the video input port 102 may be part of a video capture card in the computer system or set top box.

The digital video stream from the video input port 102 is optionally compressed at compression unit 104. In one
30 embodiment, the video is already compressed, such as would be the case with an Moving Picture Experts Group 2 (MPEG 2)

specification (available from the International Standards Organization Standard ISO1172) compliant video signal, and no further compression is needed. The video stream is then stored in the storage unit 108. A buffer unit 106 may be used as temporary storage for providing larger sequential blocks of video data to the storage unit 108. In one embodiment, the buffer unit 106 comprises a random access memory that allows relatively quick access to any portion of the stored video stream.

The video stream is played back by reading the video stream from the storage unit 108. If the video stream was compressed in compression unit 104, then a decompression unit 110 decompresses the retrieved video stream. The video stream is provided from a video output port 120, to a monitor or other display device such as a TV to provide sound and/or video to a user.

A removable storage unit 122 may also be included in video record and playback system 100, Examples of removable storage units include a writeable compact disk read only memory (CD-ROM), writeable digital video disk (DVD), a flash memory, or another hard disk. The availability of a removable storage unit 122 allows a user to transfer a recording of a video stream stored in storage unit 108 to the removable storage unit 122 and then to transfer the unit 122 to another system at a different location.

In one embodiment, a processor 130 controls the operations of the video record and playback system 100. The compression unit 104 and decompression unit 110 may be implemented in hardware, or the compression and decompression functions of units 104 and 110 may be

performed by the processor 130. Processor 130 receives instructions from firmware/memory 140, using technology that is well known.

Figure 2 shows a flow chart of an embodiment of a method of providing a time-shifted video stream in accordance with the present invention. The flow chart begins at block 200, and continues at block 202 where the video stream is received. The recording of the video stream begins at block 204. At block 206, playback of the recorded video stream is performed by retrieving a portion of the video stream from the random access storage unit while the recording of the incoming video stream continues. The retrieved portion of the video stream may be time-shifted from the incoming video stream by a time delay. At block 208, the portion of the video stream retrieved from the random access storage unit is retrieved for display by a television or other display device.

In this way, the record and playback functions are decoupled from one another. The user may now begin watching a recorded TV show from the beginning, e.g., prior to the show being completely recorded.

Figure 3 shows an embodiment of a method for retrieving a portion of the video stream from the random access storage unit while continuing to record the incoming video stream in accordance with the invention, although the invention is not restricted to this embodiment. In the disclosed embodiment, the substantially simultaneous recording and playback of the video stream is performed by multiplexing or alternately storing the video stream to the random access storage unit and reading of the video stream from the random access storage unit. The multiplexed or

alternated stores and reads may occur quickly enough that the user does not notice an appreciable delay in the playback of the video stream, and the incoming video stream is not lost, e.g., all of the video stream is recorded.

5 Thus, the record and playback are substantially simultaneous from the user's point of view.

In one embodiment, the random access storage unit comprises a hard disk. The retrieval of the time-shifted video signal from the hard disk is performed at a first
10 physical location (or sector) of the hard disk, and the storing to the hard disk of the incoming video stream is performed at a different physical location (or sector) on the hard disk. Because it takes more time to jump back and forth between different sectors of the hard disk than to
15 read and write to sequential locations in the same sector, data may be buffered to reduce the number of accesses to and from the hard disk using buffer 106. This increases the amount of data transferred per access.

Additionally, because of time constraints for reading
20 and writing to the hard disk, data may be compressed and decompressed to speed transfers to and from the hard disk.

In block 302, the video stream is stored in a random access storage unit. The video stream is optionally compressed and/or buffered prior to storage. In block 304,
25 the video stream is retrieved from the random access storage unit. Buffering and/or decompression may be performed before providing the retrieved video stream to the video output port 120.

The next portion of the video stream is stored (block
30 306) as described in block 302. At block 308, the next portion of the video stream is retrieved as described in

block 304. This process is repeated until either the recording or playback cycle is terminated.

Figure 4 shows one embodiment of an apparatus for storing the video stream in the storage unit 108 in accordance with the invention. Again, the invention is not restricted in scope to the illustrated embodiments. In this embodiment, the video stream is stored as separate files 001 and 009 on a hard disk, for example. The processor 130 keeps track of the file and offset into the file of the data being played back, as well as the file and offset into the file of the data being recorded. If the random access storage unit is fast enough, more than one video stream may be recorded and played back at the same time.

Due to the nature of the random access storage unit being capable of easily recording over itself, the random access storage unit may act as a temporary buffer for recording the latest portion, or X number of minutes, of an incoming video stream, where X is set up based upon the size of the storage unit in this particular embodiment. In one embodiment, X could be set up to be the entire storage unit. As newer portions of the video stream are received, they overwrite the older portions of the video stream saved in the random access storage unit. In this manner, the temporary buffering of the video stream acts as a circular buffer. In one embodiment, the processor 130 maintains pointers to the beginning and ending points of the temporary buffer. The processor 130 reassigns the pointers as newer portions of the video stream are received and/or older portions of the video stream are overwritten.

Figure 5 shows a flow chart 500 of an embodiment of one method for using a temporary buffer in accordance with the invention. At block 502, the video stream is received at an input. Recording of the video stream to the storage unit begins at block 504. At block 506, older portions of the video stream are deleted as newer portions of the video stream are stored to the storage unit.

A user may initiate a playback cycle following block 506. For example, this may occur when the user wishes to re-view a video clip that he just saw. In one embodiment, the user stops recording to the temporary buffer and plays back the last portion of the temporary buffer.

However, it may be more desirable to the user to be able to continue recording as shown at block 508. A record and playback cycle (as described with respect to Figure 2) is started, in which the incoming video stream is recorded while the user re-views the last portion of the temporary buffer. In this manner, after re-viewing the desired video clip, the user can resume sequentially watching the video stream from the current point of the incoming video for substantially simultaneous playback and record.

At block 510, after the record and playback cycle is completed, all or part of the temporary buffer may be saved. Since the temporary buffer stores the latest X minutes of the video stream prior to the record and playback cycle, all or part of the temporary buffer may be allocated to the portion of the video stream saved during the record and playback cycle. Other portions of the video stream may then be deleted from the storage unit, or they may be marked as overwriteable and used as a new temporary buffer.

Figure 6 illustrates an embodiment of a method for playing back a video stream to allow the playback to catch up to the incoming video stream in accordance with the invention. If the playback is performed at an overall rate
5 faster than the rate at which the incoming video stream is received, then the playback may catch up to the incoming video stream.

For example, playback of the video stream may have an overall rate faster than the rate of the incoming video
10 stream if the playback is fast forwarded, or if segments of the playback are skipped altogether. When the time delay of the time-shifted video stream being played back falls below a certain threshold, the video and playback system
100 will cease providing the time-shifted video stream from
15 the storage unit. Instead, the incoming video stream will be provided to the video output port 120 directly. In one embodiment, a bypass 142, as shown in Figure 1, allows the incoming video stream to be provided to the video output port 120 directly.

20 When this happens, the user has caught up to the "live" broadcast, e.g., the incoming video stream in this embodiment. The user may terminate the recording cycle, if he wishes. Alternatively, the user may put the video record and playback system 100 back into the temporary
25 buffering mode in which only the latest portion of the video stream is stored.

Figure 7 shows an embodiment in which the user is able to suspend the display of the incoming video stream. This can be used for example, when the user is interrupted, and
30 wishes to continue viewing the video stream after the interruption. When interrupted, the user signals to the

video stream and playback system 100 to suspend the display of incoming video stream. This can be done via a remote control, for example. At block 702, the video output signal is suspended. In one embodiment, the video output port continues to provide a still image of the image present at the instance when the suspend was encountered.

At block 704 the incoming video stream is recorded but is not displayed to the monitor. Instead the playback is paused at the point at which the user indicated that the incoming video stream be suspended. When the user is ready to view the video stream again, he can signal the video record and playback system 100 to un-suspend the video stream so that it plays back from the point at which the video stream was suspended, as shown in block 706.

The user may then view the video stream time shifted by the amount of time that he suspended the incoming video stream, or he may fast forward (or rewind) through the time-shifted video stream. When playback of the time-shifted video stream catches up to the point at which the incoming video stream is being recorded, the record and playback system 100 may display the incoming video stream directly from incoming video stream without retrieving the video stream from the storage unit, as described with respect to Figure 6. The recording of the video stream may then be terminated by the user, if desired.

Employing a random access storage unit for storage of the video stream facilitates jumping to various points within the video stream. One way of jumping is by retrieving different time slices of the video stream. For example, an image frame from the video stream can be retrieved from the storage unit at 1 minute intervals from

a current position of the video stream. In one embodiment, an image frame at the current playback position + 1 minute, current playback position + 2 minutes, and so forth are retrieved and displayed on the TV screen in a mosaic pattern.

Figure 8 shows an example of a display screen 800 which displays several image frames taken from the video stream at different times. In Figure 8, the current playback position is designated as X. In one embodiment, the time interval, T, is user programmable. The intervals may be multiples of the time interval, as shown. A small interval may be used if the user wishes to skip a commercial, which usually lasts only a few minutes. Longer intervals such as a half hour may be useful for determining which movies are recorded on a storage unit.

After the image frames are displayed, the user is able to select one of the frames as a new starting point to which to begin an operation, such as a playback or record operation. By using such a story boarding method, it is easy for a user to quickly jump to a desired location within the video stream.

In one embodiment, the record and playback system 100 is able to detect a black screen or fade out, such as those which accompany the beginning or end of a commercial. This is useful in editing a video stream. The system may also record a series of cue points (e.g., fade outs and fade to black) for later reference.

Having the video stream stored on a random access storage unit such as a hard disk allows for easy editing of the video stream. Individual frames of the video stream

may be deleted or replaced. For example, a commercial may be replaced by a fade-to-black sequence.

Once the video stream on the storage unit has been edited, it can be stored to a more permanent medium, such as a writeable CD-ROM, flash memory, or another hard disk via the removable storage unit 122.

Referring now to the embodiment shown in Figure 9, a flow chart 900 for digitally recording a video stream in accordance with an embodiment of the invention begins by capturing the video stream as indicated in block 902. If the stream is an analog stream, it may be digitized in an analog-to-digital conversion process as indicated at block 904. Next the digital stream may be encoded and compressed, for example using the MPEG2 compression scheme, as indicated in block 906. The stream is alternately read, as indicated at block 910, and stored, as indicated in block 908, in a conventional storage device such as a hard disk drive, a digital video disk or a flash memory. Data that is read from the storage device may be decoded and decompressed using conventional technology, for example, as indicated in block 912, for display as indicated in block 914.

A system 1000 in accordance with one embodiment of the present invention, shown in Figure 10, includes a processor 1002. In one embodiment, the processor may be coupled to an accelerated graphics port (AGP) chipset 1004 for implementing an accelerated graphics port embodiment. The chipset 1004 communicates with the AGP port 1005 and the graphics accelerator 1006. The television 1010 may be coupled to the video output of the graphics accelerator 1006. The chipset 1004 accommodates the system memory

1008. The chipset 1004 is also coupled to a bus 1012 which
may be, for example, a peripheral component interconnect
(PCI) bus (PCI Local Bus Specification, Version 2.1 June 1,
1995). The bus 1012 couples to TV tuner/capture card 1014
5 which is coupled to an antenna 1015 or other video input
port, such as a cable input port, a satellite
receiver/antenna or the like. The TV tuner and capture
card 1014 selects a desired television channel and also
performs the video capture function (block 902, Figure 9).
10 One example of video capture card is the ISVR-III video
capture card available from Intel Corporation.

The bus 1012 is also coupled to a bridge 1016 which
couples a hard disk drive 1018. The software 1020, 1022,
1024, 1026, 1028, and 1030 may be stored on the hard disk
15 1018. The bridge 1016 is also coupled to another bus 1032.
The bus 1032 may be coupled to a serial input/output (SIO)
device 1034. The device 1034 is in turn coupled to
conventional components such as a mouse 1036, a keyboard
1038, and an infrared interface 1040. Also coupled to the
20 bus 1032 is a basic input/output system (BIOS) 1042.

An example of a display 1100, shown in Figure 11, for
the television 1010 may display a conventional television
picture or program 1101 and, in addition, may have
superimposed over the screen, in a discrete fashion, a
25 mouse selectable series of icons, such as the icons 1102
through 1114. When the mouse cursor 1116 selects the
appropriate one of the icons, a corresponding feature may
be implemented. Among the features that may be implemented
in this fashion include a pause or stop function 1102, a
30 start record function 1104, a fast forward function 1106, a
rewind function 1108, and a 10 second replay function 1110

which winds back 10 seconds (or some other amount) and replays, and a catchup function 1112 that begins playing back recorded content at a faster than normal rate until the display catches up with a live broadcast and an electronic program guide 1114. The above described functions 1102, 1104, 1106, 1108, 1110, and 1112 may also be individual buttons on a remote control unit.

Referring next to Figure 12, a program 1020 called display is used to control various features implemented by the computer 1000. Initially a check is made at diamond 1200 to determine if an electronic programming guide (EPG) is implemented. An electronic programming guide is an electronic depiction of the various programs that are available at different times. The electronic programming guide can be provided on a disk, over a modem, by an Internet connection and using an interactive broadcasting transmission such as Intericast[®] 2.0 interactive broadcasting software available from Intel Corporation although the invention is not limited in scope in this respect.

If a particular television program is selected (even if the program is only selected for viewing) on the EPG, an identifier for that particular program may be stored, in one embodiment, as indicated at block 1202, and automatic recording of the program begins (block 1204). In this way the stored version of the program is available to implement the various features described herein even if the storage function was not particularly requested. Because the information is stored in an overwriting fashion, no harm is done by recording the information even if the information turns out not to be useful.

Referring to Figure 17, an electronic program guide user interface 1700 may be deployed on the television 1010. When the user mouse clicks a box image 1702, representing a given television program, using the cursor 1116, that
5 program is automatically recorded.

Continuing in Figure 12, an inquiry (diamond 1206) checks whether the user has selected the zoom feature for playback. If the user presses a zoom button during playback, a zoom feature is implemented in one embodiment.
10 In one embodiment, five predefined quadrants in the television display may be defined including four quadrants located peripherally around a central quadrant. When the user selects the zoom feature the user indicates the appropriate quadrant for the zoom (block 1208). The
15 selected quadrant is scaled (block 1210) to produce a larger (zoom) picture.

Referring to block 1208, the pointer focus is identified to determine which quadrant will be zoomed. That quadrant is then scaled as indicated at block 1210.
20 Because the television program is continually being stored, the scaling can be implemented without any loss of continuity of the television picture. After the user has completed looking at the zoomed depiction, the user can return to the program at the point where he or she departed
25 to view the zoomed depiction. Thereafter, the displayed depiction viewed by the user may be time delayed from the actually broadcast program. However the user is able to view the program in its entirety even if slightly time delayed.

30 Next, a query is made at diamond 1212 to determine whether a pause function has been selected. If so, the

playback is stopped as indicated at block 1214 but recording continues unabated as shown in block 1216.

The next check determines whether the play feature has been selected (block 1218). If so the recorded content is played thereby terminating the paused display. However, while the recorded content is displayed, recording continues as indicated in block 1222 so that the recorded content may be eventually displayed without disrupting the continuity of the program.

A query finds out if the fast forward feature has been implemented as indicated in diamond 1224. If so, a fast playback is implemented as shown in block 1226. Once the playback equals the current broadcast or program content (diamond 1228), the flow returns to display current broadcast or program content. The fast forward may progress at 300 to 400% (or some other speed) of normal playback speed.

Moving on to Figure 12A, at diamond 1230 a check is done to see if the 10 second replay feature has been activated. If so, the storage device is operated to find the content which was recorded 10 seconds ago (block 1232). The recorded content is then played (block 1234) from the 10 second period back to present. This would correspond to the replay feature implemented with broadcast television sporting events. After the "rewind" and playback of 10 seconds has been completed, the system is automatically transferred to automatic play at the content that was recorded while the replay is being displayed so the user does not lose any continuity in the show. Of course, the user can set the amount of time for the replay to be something other than 10 seconds.

A catchup feature is checked (diamond 1236) and, if this feature has been selected, an accelerated playback option is implemented (as indicated in block 1238). In the accelerated playback, the playback may be slightly
5 increased in speed, for example from 105 to 115% of actual speed, so the user can easily follow the program but can make up for lost time to get back into the program as broadcast. Once the recorded program catches up to the real-time program as indicated in diamond 1240, the catchup
10 feature is completed and the user returns to real-time display. A conventional technique may be used to maintain audio pitch during accelerated playback.

Control over the record and playback functions may be implemented through a normal mouse function, for example,
15 by clicking on icons as indicated in Figure 11. In addition, the record and playback features may be controlled remotely even when the user is not proximate to a keyboard or mouse. This may be done using a conventional remote control operator which may, for example, utilize
20 infrared radiation.

As indicated in the depiction of an example of a system 1000 (Figure 10), an infrared adapter 1040 may be provided, for example, in compliance with the standards and specifications (such as Infrared Data Association Serial
25 Infrared Link Access Protocol Version 1.0, June 23, 1994) of the Infrared Data Association (which can be found at {www.irda.org}). The remote control 1300, as shown in Figure 13, may be utilized as a separate stand alone remote control or its features may be incorporated into a global
30 remote control. The illustrated control 1300 is a stand alone control for controlling the record and broadcast

features. It includes an infrared transmission port 1302 and a plurality of buttons to control the various features. For example, a zoom function 1312 may be implemented as a four-way rocker switch. A zoom is implemented for the top quadrant of a display by pressing the upper edge of the button. If the button is pressed in the middle, the center quadrant is chosen for zoom. Likewise any of the remaining three edges of the zoom button can be operated to select a desired quadrant for zoom features.

A button 1306 is provided to implement the replay function, a button 1308 may implement the pause feature, and an enter button 1310 may be provided to allow entry of various information including a particular television program station. An on/off button 1314 may also be provided. Fast forward may be implemented by button 1316, an electronic program guide may be called by pressing button 1304. The catch up feature may be called by the button 1318, and a 10 second reply may be implemented by the button 1320. A conventional numeric keyboard 1322 may be provided to input additional information including selected television channels.

Techniques for storing the video stream onto the storage device 1410 and for reading the information out of the storage device are summarized in Table 1 below and illustrated in Figures 14, 15, and 16. In Figure 14, a schematic depiction of the storage system 1400 includes a digital storage device such as a hard disk drive 1410. The digitized video 1402 is initially stored in a buffer which is designated as being currently on the top of the memory stack. The transfer of information between the buffers and the storage device 1410 may be done in discrete time

Buffers	Time Steps								
	1	2	3	4	5	6	7	8	9
Input	1404	1408	1406	1404	1408	1406	1404	1408	1406
Storage Read	X	X	X	1412 1414	X	1414 1416	X	1412 1416	X
Write	X	X	1404 1408	X	1404 1406	X	1406 1408	X	1404 1408
Output	X	X	X	X	1414	1412	1416	1414	1412

Table 1 (X = no action)

5 periods referred to herein as time steps. In a first time step, shown in Figure 15, the digitized video 1402 (Figure 14) is stored in memory buffer 1404 because that buffer is currently at the top of the memory stack, as indicated in block 1502 in Figure 15.

10 As the buffer 1404 fills up, the buffer 1408 moves to the top of the stack (as indicated by the dashed arrow) and incoming video is stored in buffer 1408. As indicated in block 1504 in Figure 15 in time step 2, the buffer 1408 replaces the buffer 1404 as the designated top of the stack
15 buffer. The next input video is then stored in the new buffer (1408) as indicated in block 1506.

In time step 3 the buffer 1408 has filled up and the contents of buffers 1404 and 1408 are written to the storage device 1410 in a single write operation. During
20 the same time step, buffer 1406 moves to the top of the stack and becomes the storage buffer for incoming video. This is illustrated in blocks 1508, 1510 and 1512 in Figure 15.

In time step 4, the buffer 1404 moves back to the top
25 of the stack to store incoming video since its previous content has already been saved in the storage device 1410.

This is indicated in block 1514 of Figure 15.

Additionally, in time step 4, the content of buffer 1408 is written to the storage device 1410 as illustrated in block 1515. The storing of incoming information, as illustrated in Figure 15 then cycles back to the top of the flow in Figure 15 and continues in the same fashion thereafter.

The content from the storage device 1410 is then read into buffers 1412 and 1414 in time step 4 and block 1602.

In time step 5, the buffer 1408 moves to the top of the stack to store incoming video, and buffer 1414 moves to the top of the output stack and transfers data to the video output 1418. The contents of the buffers 1404 and 1406 are then written to the storage device 1410.

The time steps 1 to 5 illustrate a complete cycle from input to output. The remaining sequence of steps repeat starting at step 1 through 4 for the input of data and time steps 4 through 9 repeat for the output of data.

Referring now solely to Figures 14 and 16, in time step 6, information stored in the storage device is read to the sixth and fourth buffers (i.e., buffers 1414 and 1416) as indicated in block 1606. The contents of the fifth buffer (1412) are sent to the output port 1418.

In time step 7, the contents of the sixth buffer (which is buffer 1416) are sent to the output port 1418. No other output operations occur.

In time step 8, the contents from the storage device 1410 are read into the fifth and sixth buffers (buffers 1412 and 1416) as indicated in block 1612. Also the contents of the fourth buffer (buffer 1414) are passed to the output port 1418 as indicated in block 1614.

Finally, during time step 9 the contents of the fifth buffer (buffer 1412) are passed to the output port 1418, completing the cycle.

Using these techniques, the storage device is provided with enough time, through the operation of the buffers, to write the incoming video while supplying enough data simultaneously to the output display. Since the memory is used to make sure no content is dropped at the input end and the display is never starved at the output end, continuous display can be provided without losing information. In addition reading and writing larger chunks of data at one time reduces the amount of storage device head movement, thereby allowing the storage device to keep up with the read and write requests.

The size of the individual buffers 1404 to 1408 and 1412 to 1416 ("B") in megabytes is dependent at least in part on a number of factors including the input/output data rate "D", for example in megabytes per second, the effective bandwidth of the storage device when reading or writing "S", for example in megabytes per second, and the average seek time for the storage device per transaction "t", in microseconds. The time that it takes to fill up one memory buffer (B divided by D) is advantageously greater than the time it takes to read or write two memory buffers (2B divided by S) plus the average seek time (t):

$$\left(\frac{B}{D}\right) \geq \left(\frac{2B}{S}\right) + \left(\frac{t}{1000000}\right)$$

Solving for the minimum buffer size in the above equation yields the following equation which gives the minimum buffer size:

5
$$B \geq \left(\frac{DS}{S-2D} \right) \times \left(\frac{t}{1000000} \right)$$

A viewer can pause a season premier of a television while the station is still broadcasting in order to get up and answer the telephone. The user can resume watching the show after interruption as if the program were on video tape. In addition, while watching a sports event the user can rewind back to a controversial pass, replay the play in slow motion, stop at the exact instance when the catch was made and zoom in on the receiver. Also, the user can apply an image sharpening filter to see if both of the receiver's feet touched the ground before the receiver went out of bounds.

Timeshifting by substantially simultaneously recording and playing back a data stream enables the following type of benefits/features for an end-user. While watching the season premiere of a television show, the viewer can literally "pause" the program in order to get up and answer the phone or get a snack from the refrigerator. After the interruption, the viewer can resume watching again without having missed anything. If the viewer came home 15 minutes late for the show but had started recording the program from the beginning, the viewer can begin watching right away instead of waiting for the show to be over and then rewinding the cassette tape. Also the viewer can replay scenes during a "live" broadcast (e.g. season premiere of a

show or sporting event) in case the viewer missed a line or an exciting play. In addition, while watching a sports event the user can rewind back to a controversial play, replay the play in slow motion, and stop at the exact
5 instance when the catch was made. To get a better view, the viewer can zoom in on a portion of the screen and apply image sharpening filters to magnify one part of the screen.

An embodiment of a video transmission system 1800, shown in Figure 18, includes a broadcast encoder 1804 which
10 transmits to a plurality of receivers 1808, only one of which is shown in Figure 18. The broadcast encoder may multiplex video transmission content 1802 which may be, for example, conventional television programming together with control information 1806. For example, the broadcast
15 encoder 1804 may transmit video information with television content from the content input 1802 with control information 1806 which may be provided, for example, over the vertical blanking interval (VBI) in a conventional airwave television broadcast. The control information 1806
20 can also be included in a variety of other ways in connection with other video transmission transports including those transmissions transmitted over satellite systems, cable systems and computer networks.

In one embodiment the control information may include
25 a cue which signals a receiver 1808 that a particular portion of a video transmission is about to occur or is occurring. The receiver 1808 may be, for example, a computer with a video card, a television, a cable converter box, a satellite receiver or even a separate unit.

30 Referring to Figure 19, an example of an embodiment of a screen display 1900 in accordance with the invention

which may be displayed on the receiver 1808 includes a portion 1902 which displays an ongoing video transmission such as a television program. The television program displayed in portion 1902 may be an ongoing display of an ongoing television video transmission. A plurality of replay portions 1904 may be displayed in other areas of the screen as illustrated.

Thus, upon selection of a desired function, the screen 1900 may display the ongoing television program either live (or as recorded) together with available replay portions that have been separately recorded and may be stored in distinct files in association with the television program 1902. The user then may select any of the sections 1904 for display during or after the television video transmission displayed in the portion 1902. During the course of the video transmission, the screen may include a full size display of the ongoing video transmission. Then, when the user desires to see what replay options are available, the screen 1900 may be selected, causing the ongoing video transmission to be displayed in a reduced format size in portion 1902.

Referring to Figure 20, the broadcast encoder 1804, which may be a conventional computer server, may, in one embodiment, include software 2000 stored in an appropriate storage medium for implementing a system wherein the receiver acquires cues when desired content is being transmitted (block 2002). For example, information that would otherwise be displayed as a replay during a television sports broadcast can be accompanied by a distinct cue which may be detected by the receiver. When the receiver detects the cue, the receiver automatically

stores the ensuing video transmission as a distinct replay which can be viewed by the receiver using the display screen format shown in Figure 19 for example.

5 The cue may be developed, for example, in response to the detection of a characteristic such as the normal transition from a normal video broadcast to a replay in a sports broadcast. A scene change detector may detect the fade in and fade out which often accompanies the transition to the replay. Alternatively, the production personnel at
10 the content provides a digital signal encoded with the control information 1806 with content that should be stored as a replay is about to begin. In this way, the user of the receiver 1808 may be provided with separate files of the various replays which accompany a video transmission,
15 such as a television program.

Automatically storing transmission segments may also be useful in connection with a variety of other video transmissions. For example a user may wish to store portions of the video transmission, such as favorite scenes
20 from a movie, separately from the rest of the transmission. These stored portions may then be readily accessible independently of the rest of the video transmission for example using the display screen 1900.

The encoder 1804 may encode the start cue in response
25 to the receipt of cue information as described previously, as indicated at block 2004 in Figure 20. This start cue may be encoded in the control information 1806 that sends appropriate content to the broadcast encoder 1804. The encoder 1804 then includes the digital information about
30 the replay or cue with the rest of the transmission, either as a signal encoded with the actual broadcast or as a

separate packet or region. For example, the information may be associated with closed caption scripting or may be included in a vertical blanking interval (VBI).

5 The content from the content source 1802, such as television content, may be transmitted together with the cue which may be part of the control information 1806, as indicated in block 2006. When the desired information has been transmitted, an end cue (block 2008) may be determined as described above in connection with the start cue. For
10 example, a unique signature may be provided in content stream either in a separate packet or area associated with the television program or included with the television content information. The end cue is then transmitted (block 2010) with the content 1802 and control information
15 1806 to the receiver 1808.

At the receiver 1808, the start cue may be detected using the software 2100, as indicated at block 2102 in Figure 21. For example, where a distinct cue is sent, it may be detected in the video transmission itself or in a
20 vertical blanking interval or in association with closed caption script as examples. Once it is detected, the receiver 1808 may activate the record function described previously, as indicated in block 2104. Thus, the user of the receiver 1808 may view the ongoing video transmission
25 at the same time the selected replay portion is actively recorded. Next, the receiver 1808 may detect the end cue transmitted by the broadcast encoder 1804, as indicated in block 2106. In response to the detection of the end cue, the recording may be terminated as indicated at block 2108.
30 In some systems, the recording may actually continue but the file associated with a particular characteristic or

replay is closed. Thus, a distinct file associated with that characteristic or replay may be separately stored and accessed even if recording continues with other material.

At diamond 2110, a query determines whether a request
5 for display of display options, such as the one shown in Figure 19 has been called. It may be called, for example, using computer mouse inputs or using a remote control as described previously. If so, the information displayed in Figure 19 may be displayed as indicated in block 2112. The
10 user can then select either the viewing of the television program or any of the portions represented by the blocks 1904.

In addition, all of the replay clips may be automatically concatenated by the receiver for display one
15 after another. This provides a "highlight package" that can be viewed to review highlights of the transmitted content. Also the catchup feature may be used with the replay. The transmitted content may be viewed in an accelerated fashion after viewing the replay to "catch up"
20 to a live broadcast.

Thus, a receiver may have a record of a video transmission together with recorded files which contain information about particular portions of that transmission which have been designated by the broadcaster as worthy of
25 separate recording in separate files. For example, in a football broadcast, the replays may then be accessed by the user repeatedly in the course of the ongoing broadcast or thereafter as desired. This may be done by simply allowing the user to mouse click on the desired screen display
30 portion 1904 associated with a particular replay. The screen display portions 1904 may each show one frame of the

recorded information to assist the user in selecting the desired content for display.

Thus, an embodiment of a method of substantially simultaneously recording and playing back a time-shifted
5 video stream in accordance with the invention is disclosed. The specific arrangements and methods described herein are merely illustrative of the principles of this invention. For example, a similar embodiment may be used to store and retrieve other types of data streams besides video streams.
10 Numerous modifications in form and detail may be made without departing from the scope of the described invention. Although this invention has been shown in relation to a particular embodiment, it should not be considered so limited. Rather, the described invention is
15 limited only by the scope of the appended claims.

What is claimed is:

1 1. A method of displaying and recording a video
2 transmission comprising:
3 monitoring an ongoing video transmission for a
4 predetermined characteristic; and
5 upon detecting said characteristic, automatically
6 recording said video transmission while said video
7 transmission is being displayed.

1 2. The method of claim 1 wherein monitoring an
2 ongoing video transmission includes monitoring for the
3 transition from a live broadcast to a replay.

1 3. The method of claim 2 wherein monitoring an
2 ongoing video transmission includes monitoring for a first
3 cue to begin the recording of the video transmission and
4 monitoring for a second cue to end the recording.

1 4. The method of claim 1 further including
2 displaying on a display screen the video transmission
3 together with one or more representations of portions of
4 the video transmission which have been recorded.

1 5. The method of claim 1 wherein monitoring an
2 ongoing video transmission for a predetermined
3 characteristic includes monitoring the transmission for a
4 digital signal indicating that recording should begin.

1 6. The method of claim 1 wherein monitoring an
2 ongoing video transmission includes monitoring a closed
3 caption transmission accompanying said video transmission.

1 7. The method of claim 1 wherein monitoring an
2 ongoing video transmission includes monitoring the vertical
3 blanking interval.

1 8. The method of claim 1 including storing said
2 recorded video transmission information on a receiver that
3 receives said video transmission.

1 9. The method of claim 1 wherein monitoring an
2 ongoing video transmission for a predetermined
3 characteristic includes monitoring for a characteristic
4 indicative of a replay.

1 10. The method of claim 1 further including enabling
2 the recorded video transmission to be replayed, and then
3 accelerating the rate of replaying a portion of the
4 transmission that occurred when the recorded video
5 transmission was being played.

1 11. A transmitter comprising:
2 a monitor that monitors an ongoing video
3 transmission and provides an indication when a
4 characteristic is detected; and
5 a transmission device that transmits said video
6 transmission together with said indication.

1 12. The transmitter of claim 11 wherein said
2 transmission device is a cable television transmitter.

1 13. The transmitter of claim 11 wherein said
2 transmission device is a satellite television transmitter.

1 14. The transmitter of claim 11 wherein said
2 transmission device is a over the air broadcast television
3 transmitter.

1 15. The transmitter of claim 14 wherein said
2 transmission device is a transmitter that transmits said
3 indication in the vertical blanking interval.

1 16. An article comprising a medium for storing
2 instructions that cause a computer to:
3 monitor an ongoing video transmission for a
4 predetermined characteristic; and
5 upon detecting said characteristic, automatically
6 record said video transmission while said video
7 transmission is being displayed.

1 17. The article of claim 16 further including
2 instructions that cause a computer to monitor for the
3 transition from a live broadcast to a replay.

1 18. The article of claim 16 further including
2 instructions that cause a computer to monitor for a first

3 cue to begin the recording of the video transmission and
4 monitor for a second cue to end the recording.

1 19. The article of claim 16 further including
2 instructions that cause a computer to display on a display
3 screen the video transmission together with one or more
4 representations of portions of the video transmission which
5 have been recorded.

1 20. The article of claim 16 further including
2 instructions that cause a computer to monitor the
3 transmission for a digital signal indicating that recording
4 should begin.

1 21. The article of claim 16 further including
2 instructions that cause a computer to monitor for a
3 characteristic indicative of a event to be recorded.

1 22. A video receiver comprising:
2 a first device to receive a video signal;
3 a second device coupled to said first device to
4 detect a characteristic of said signal; and
5 a video recorder that records said video signal
6 in response to the detection of said characteristic.

1 23. The receiver of claim 22 wherein said second
2 device detects a cue encoded with the video signal.

TIME SHIFTING BY SIMULTANEOUSLY RECORDING
AND PLAYING A DATA STREAM

Abstract of the Disclosure

A video stream may include portions that are stored while other portions are being displayed. In one embodiment, a portion of the video stream may be stored in digital storage media at one instance while in the next
5 instance another portion of the stream is being read out of the storage media.

FIG. 1

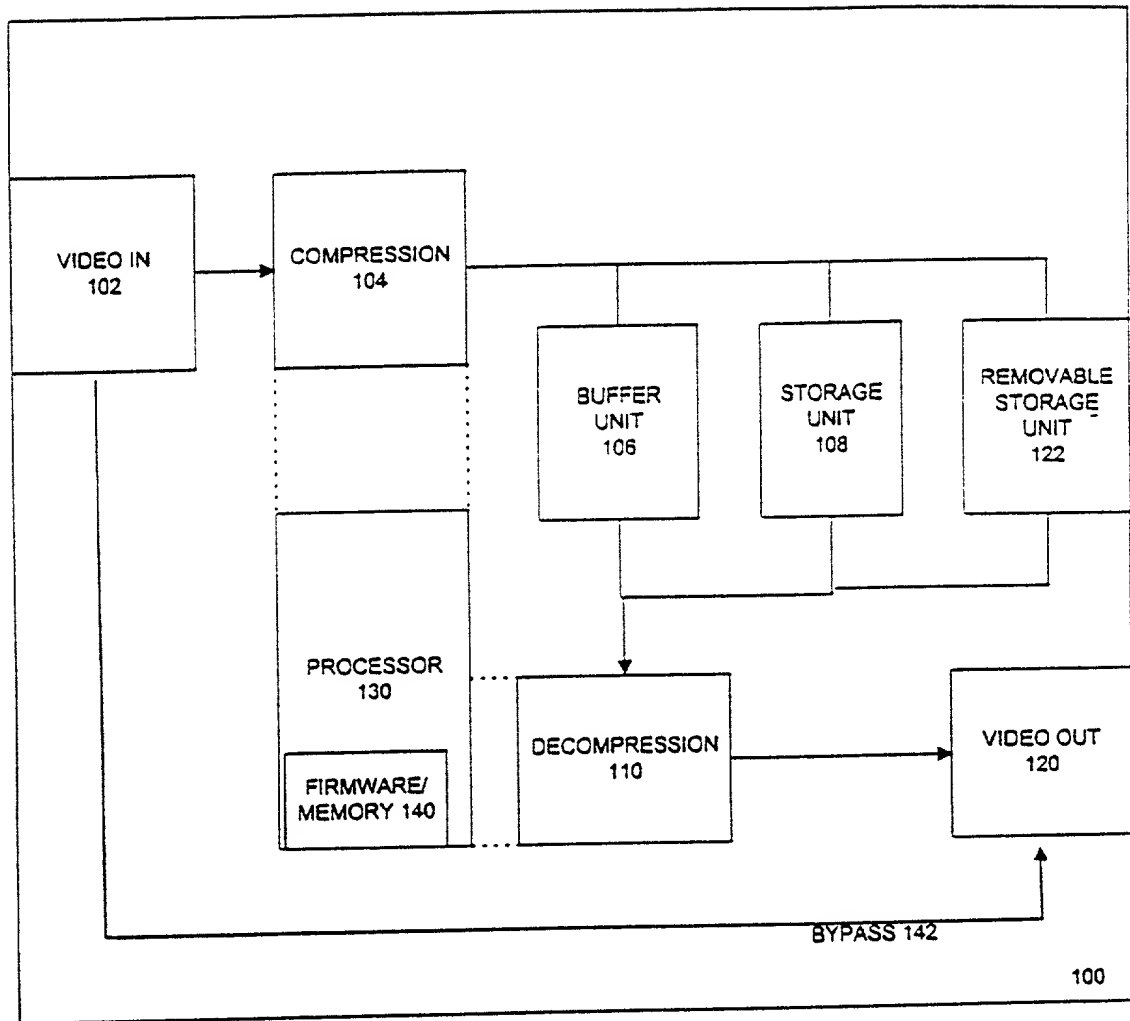


FIG. 2

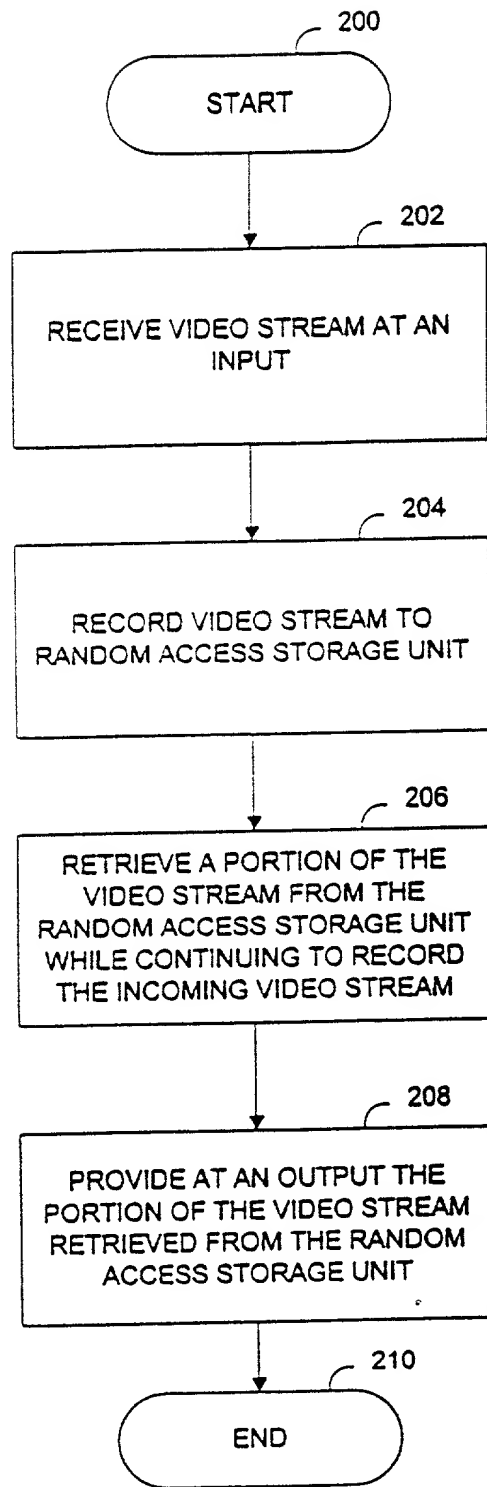


FIG. 3

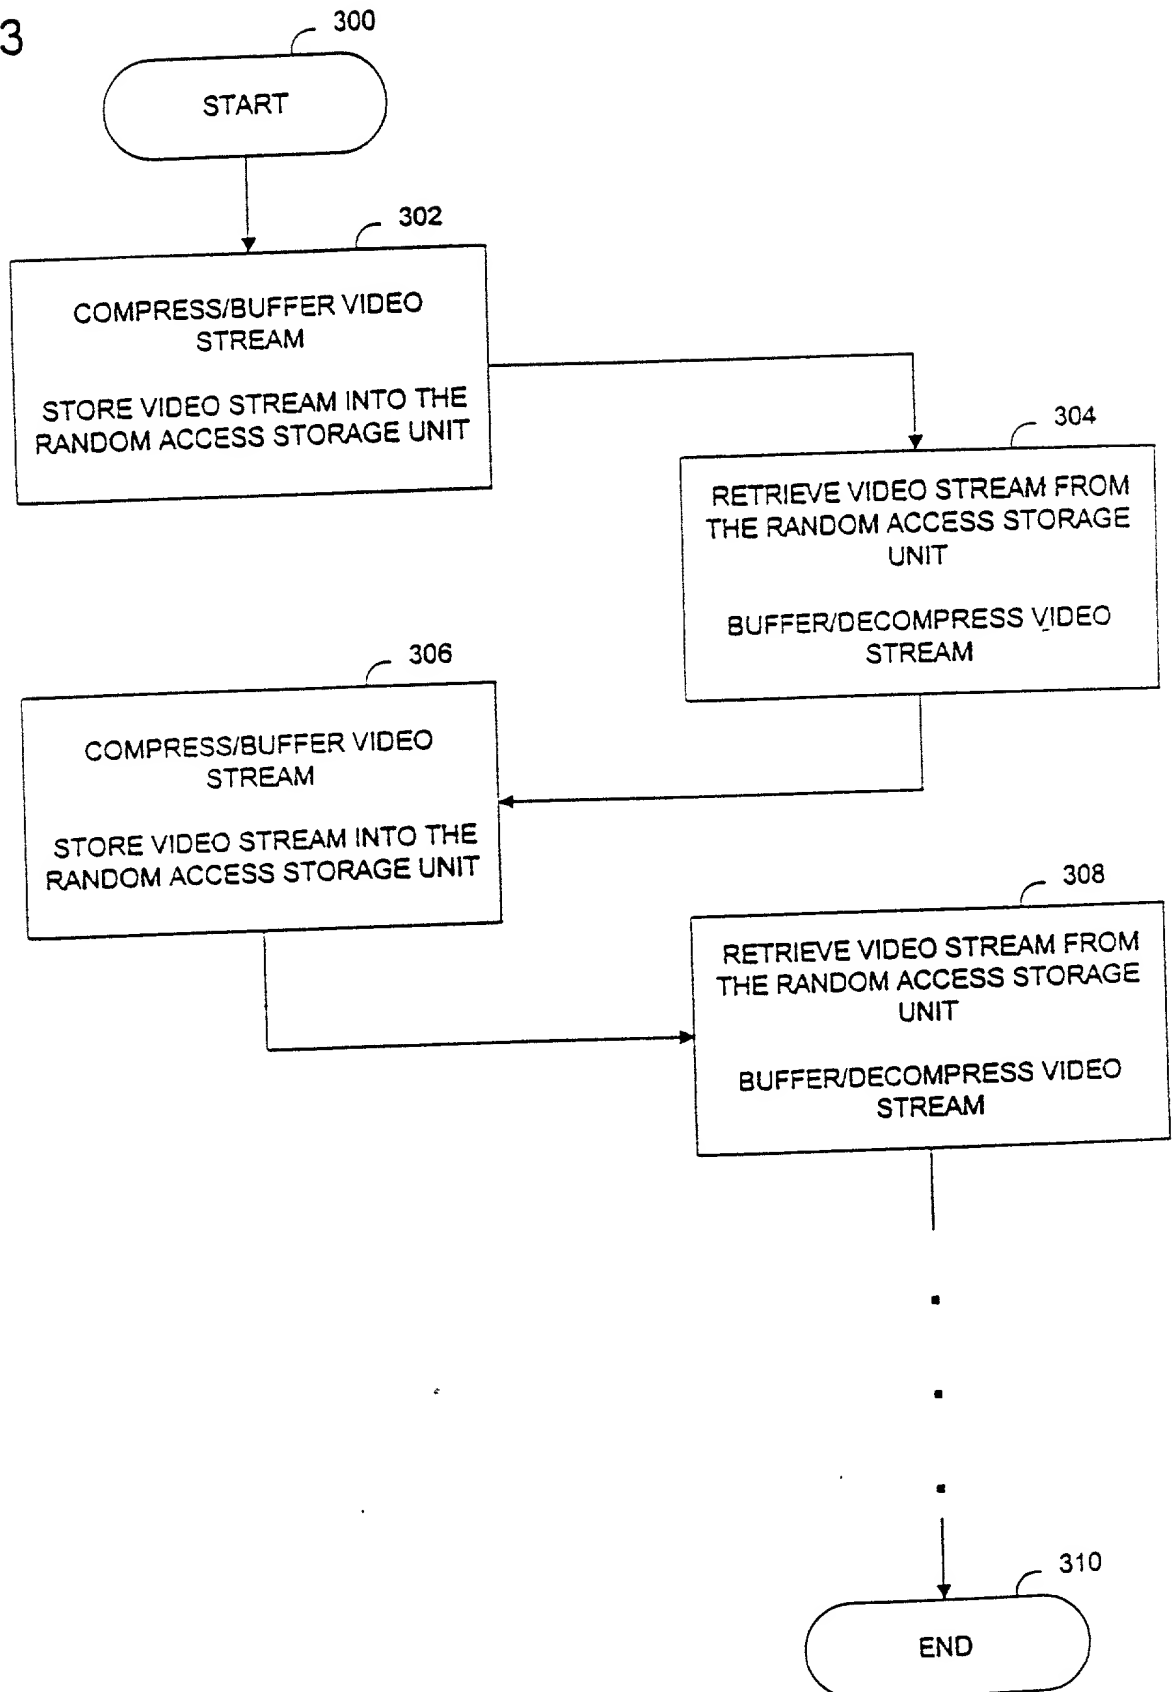


FIG. 4

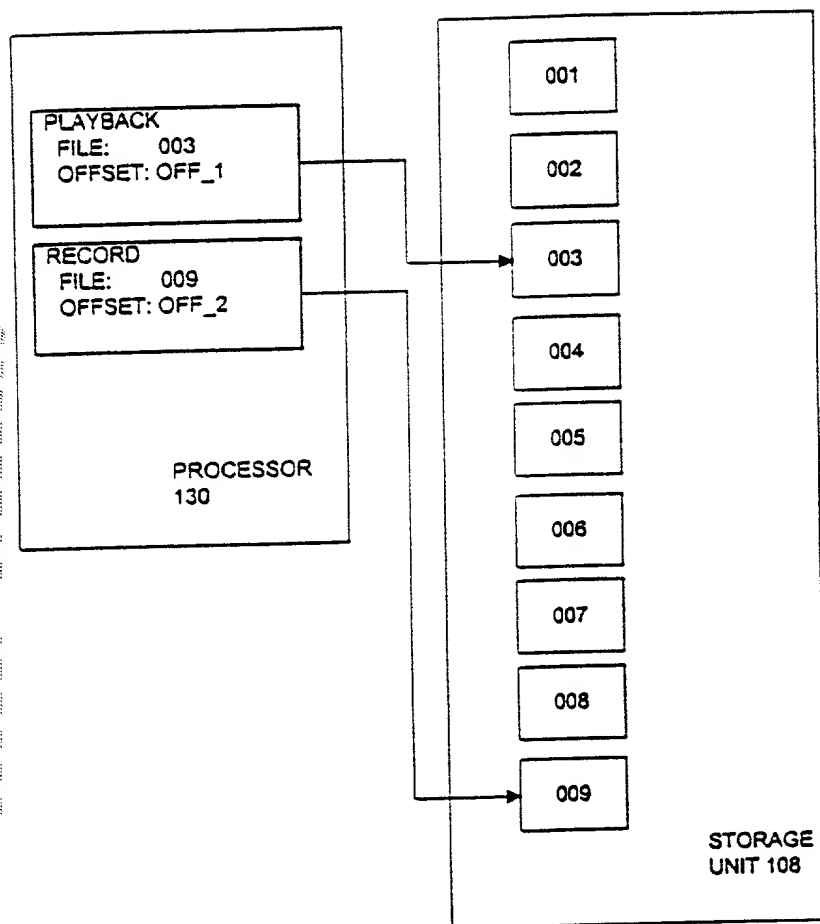


FIG. 5

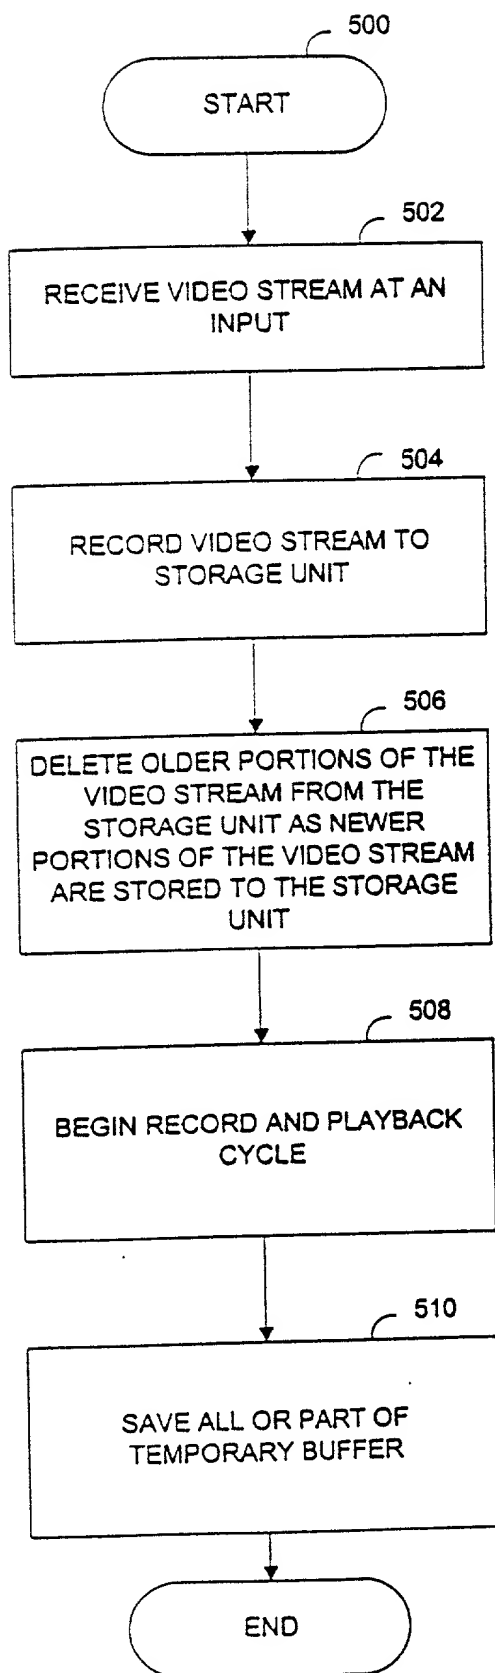


FIG. 6

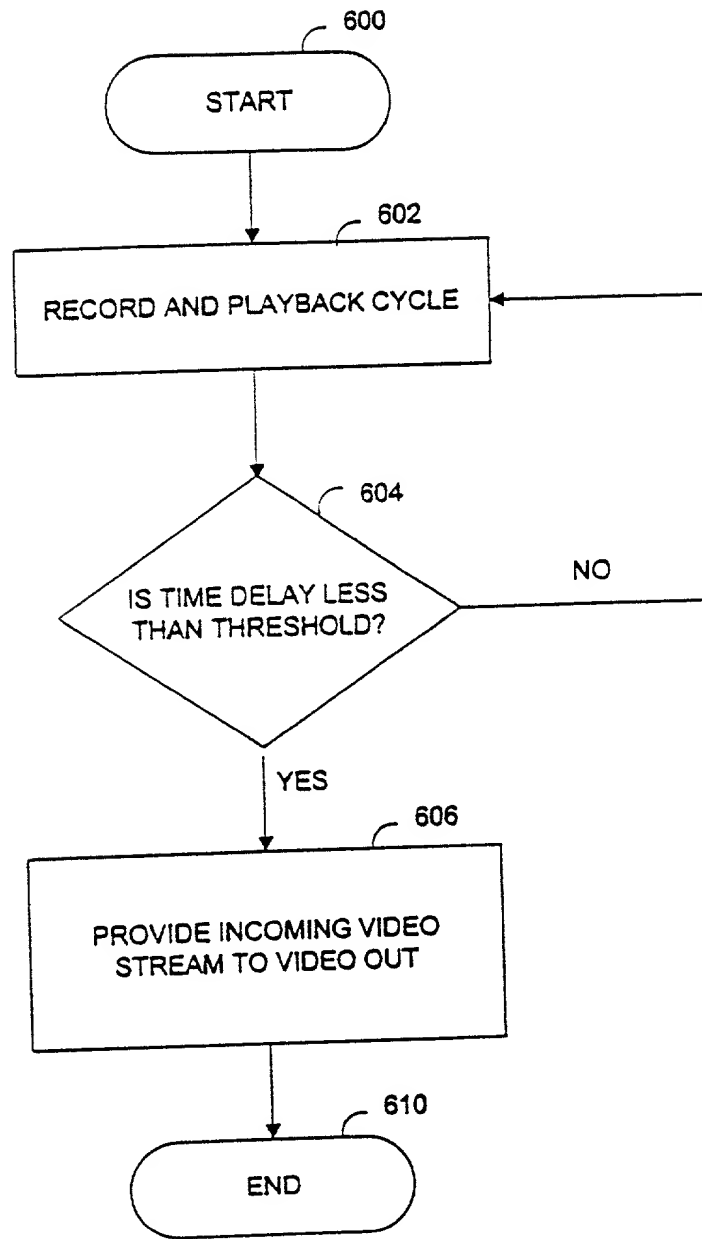


FIG. 7

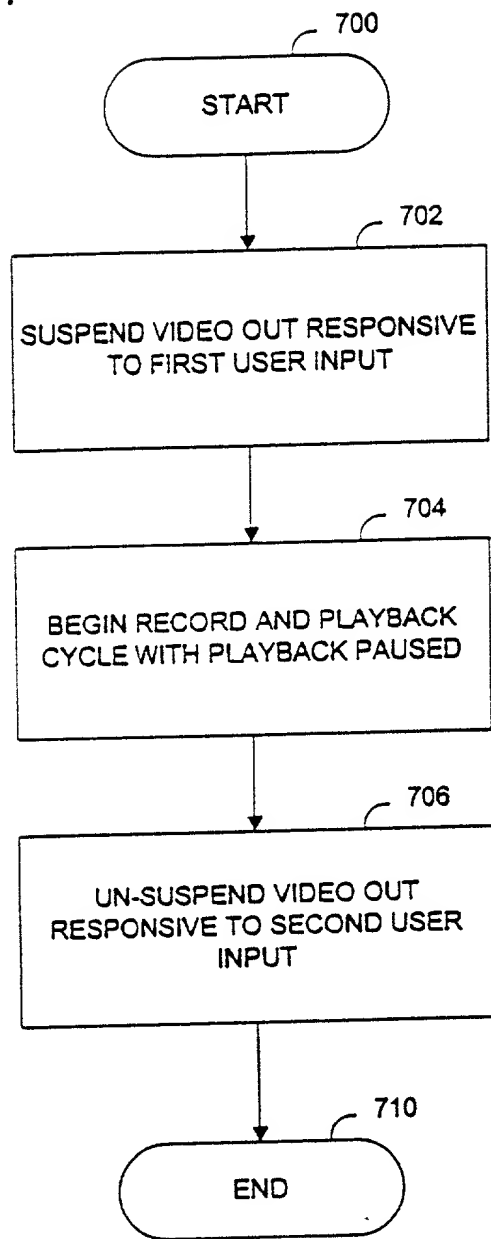
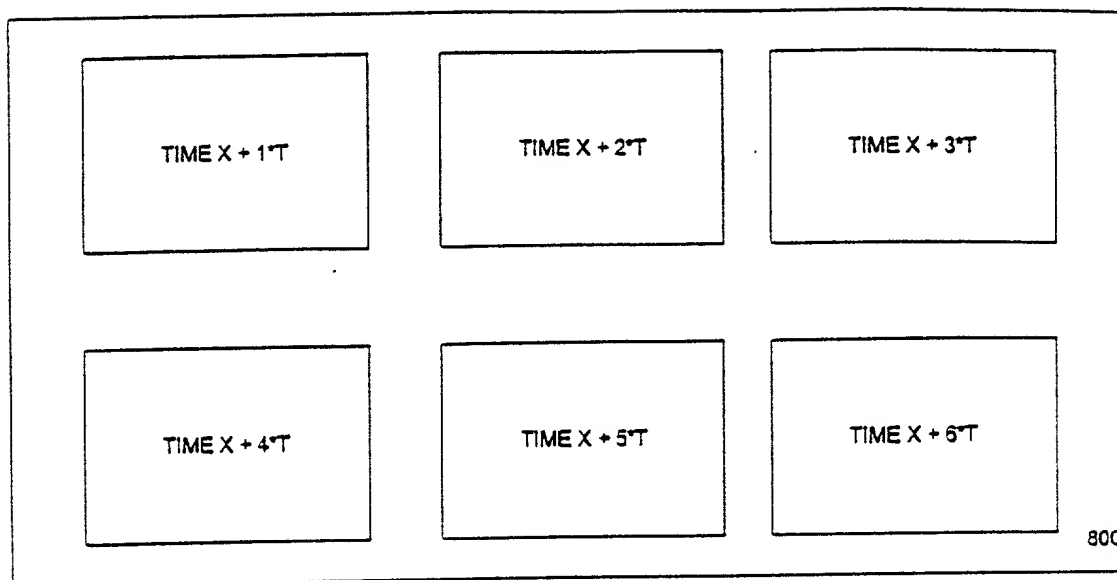


FIG. 8



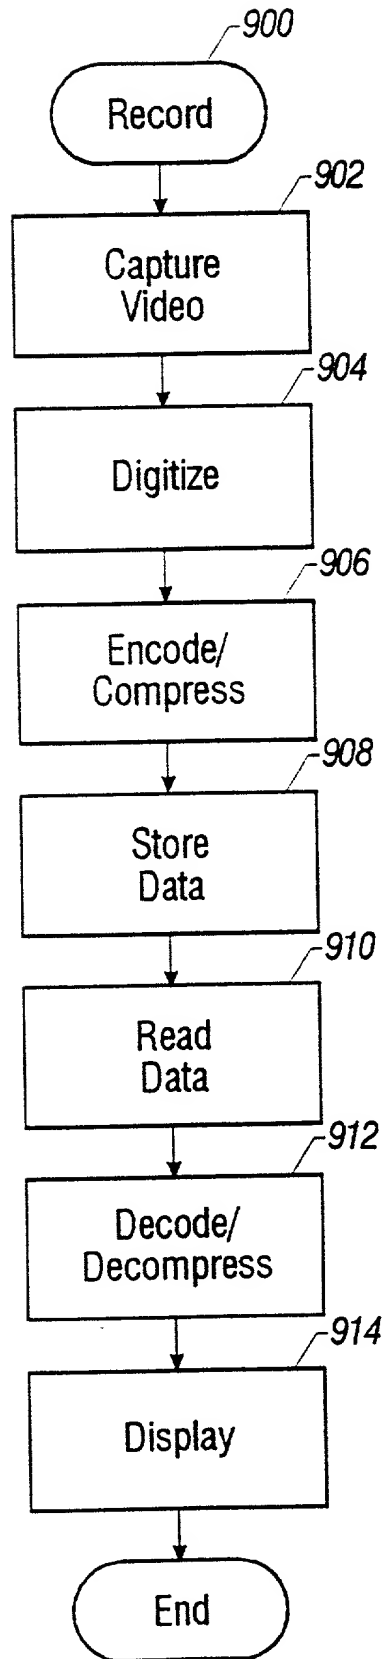


FIG. 9

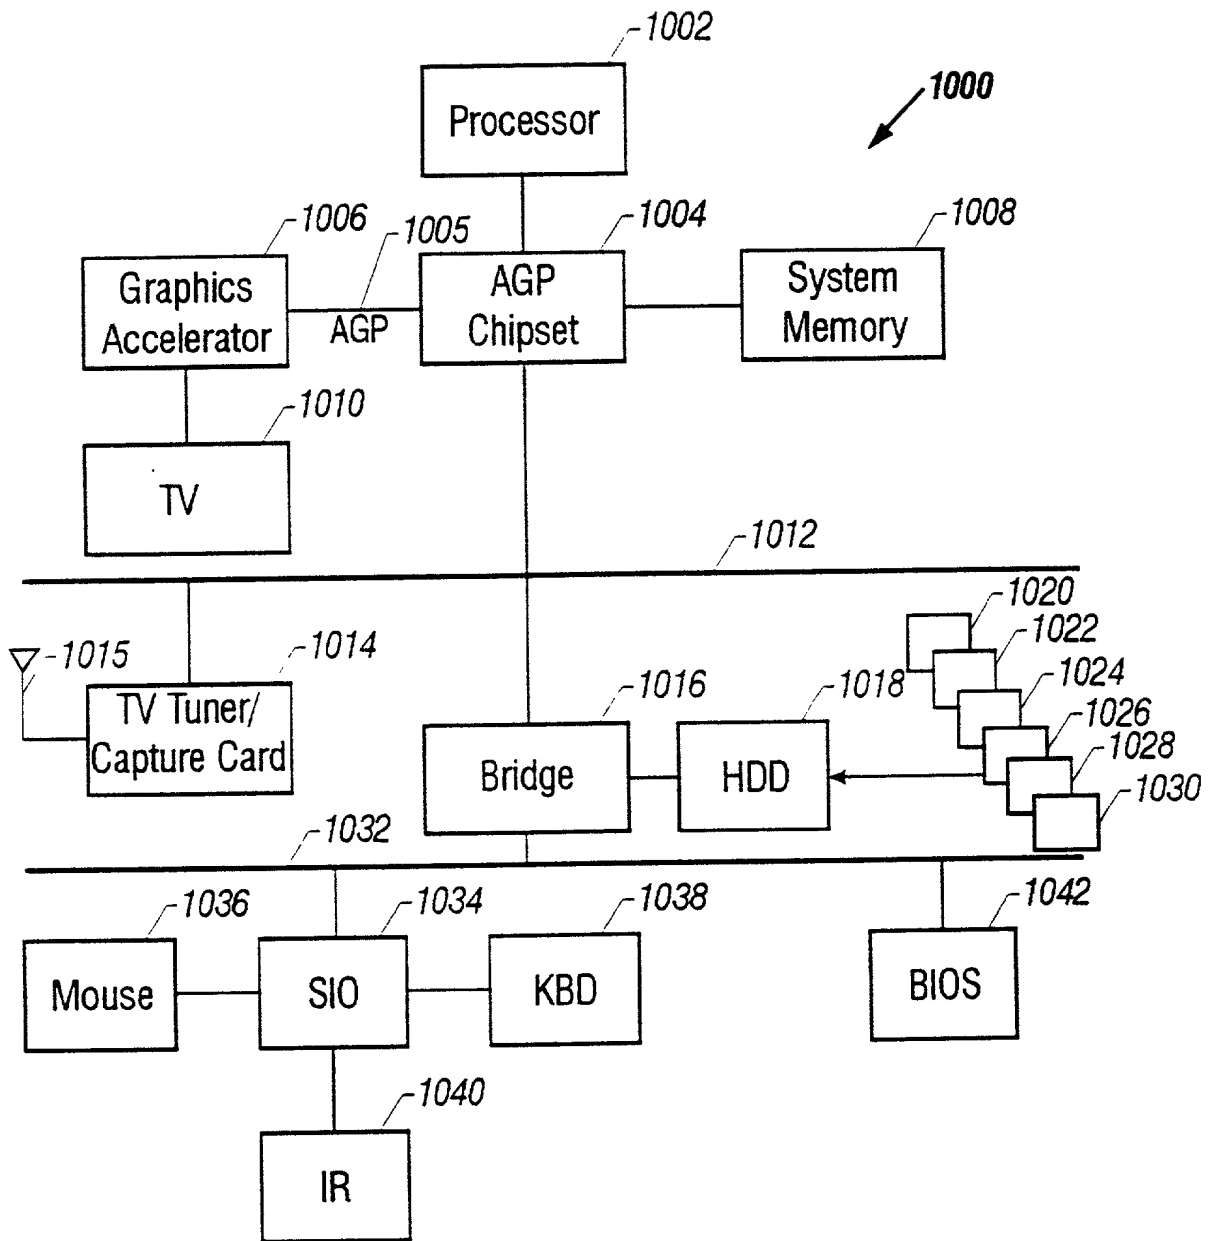


FIG. 10

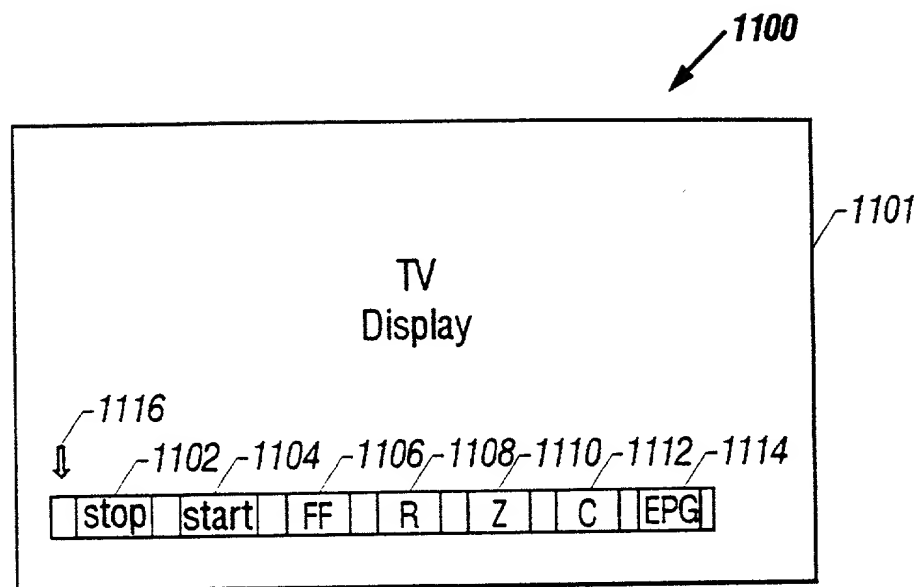


FIG. 11

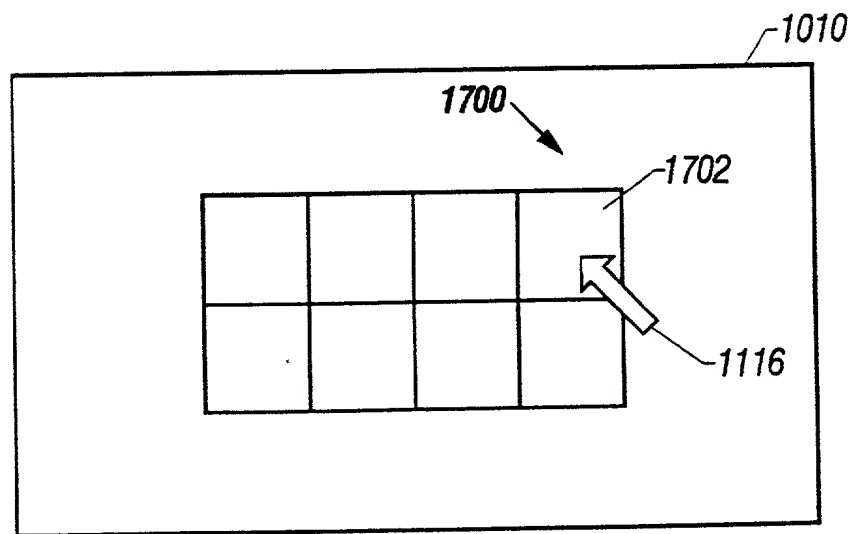


FIG. 17

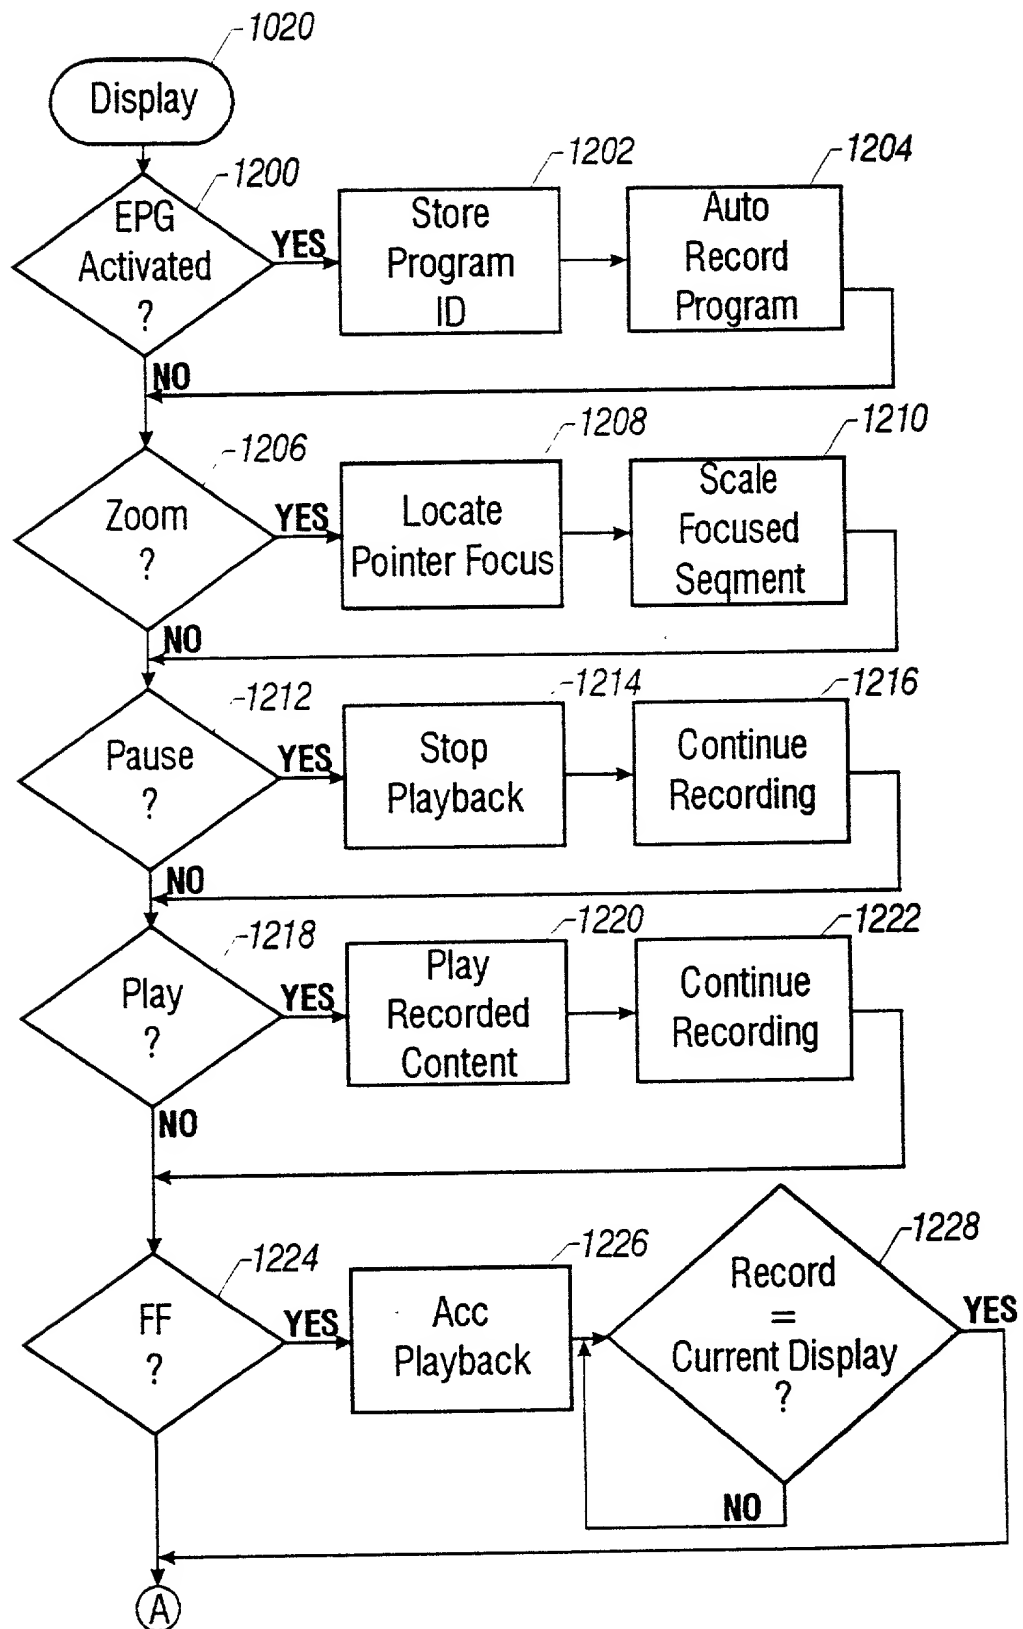


FIG. 12

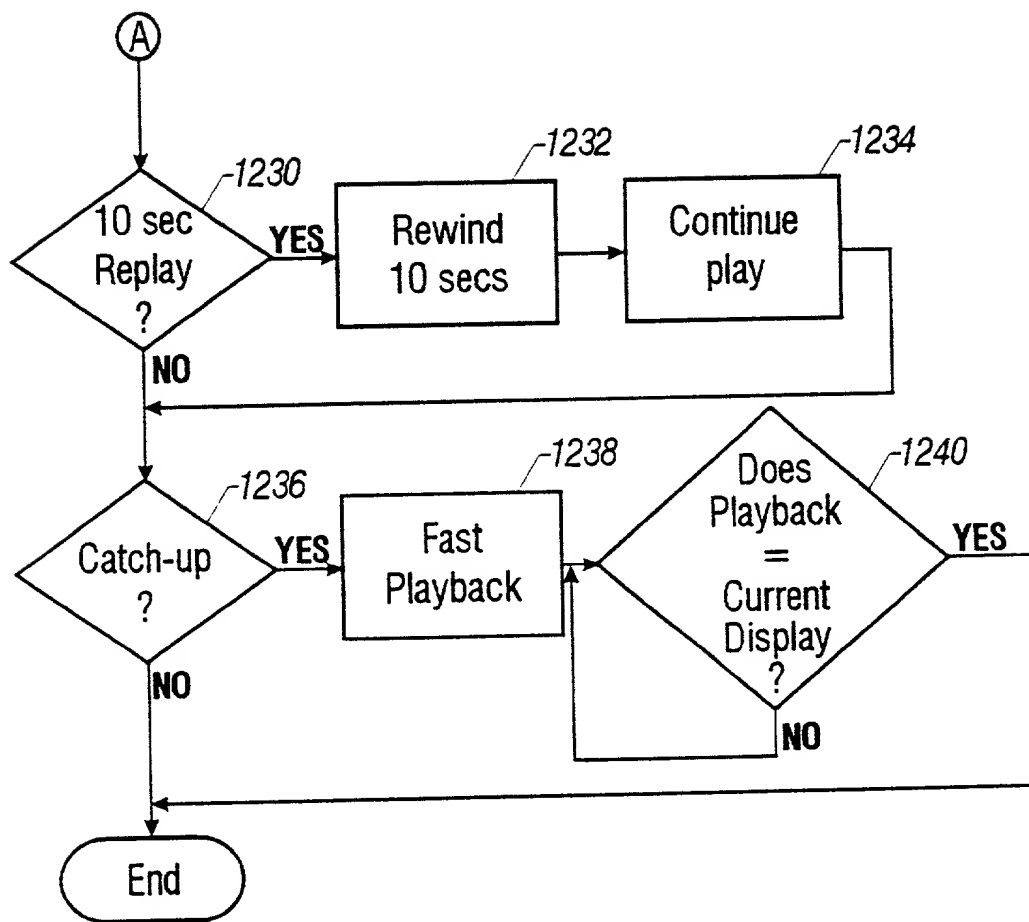


FIG. 12A

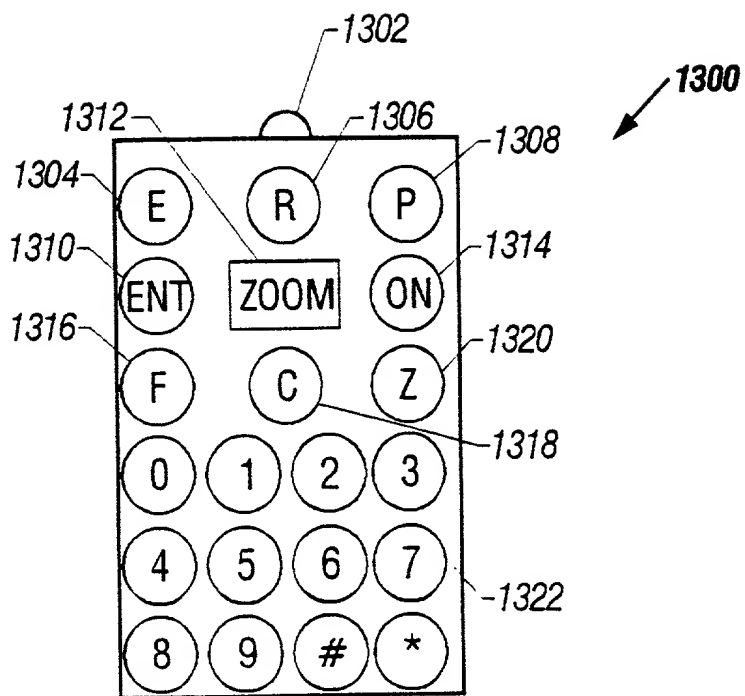


FIG. 13

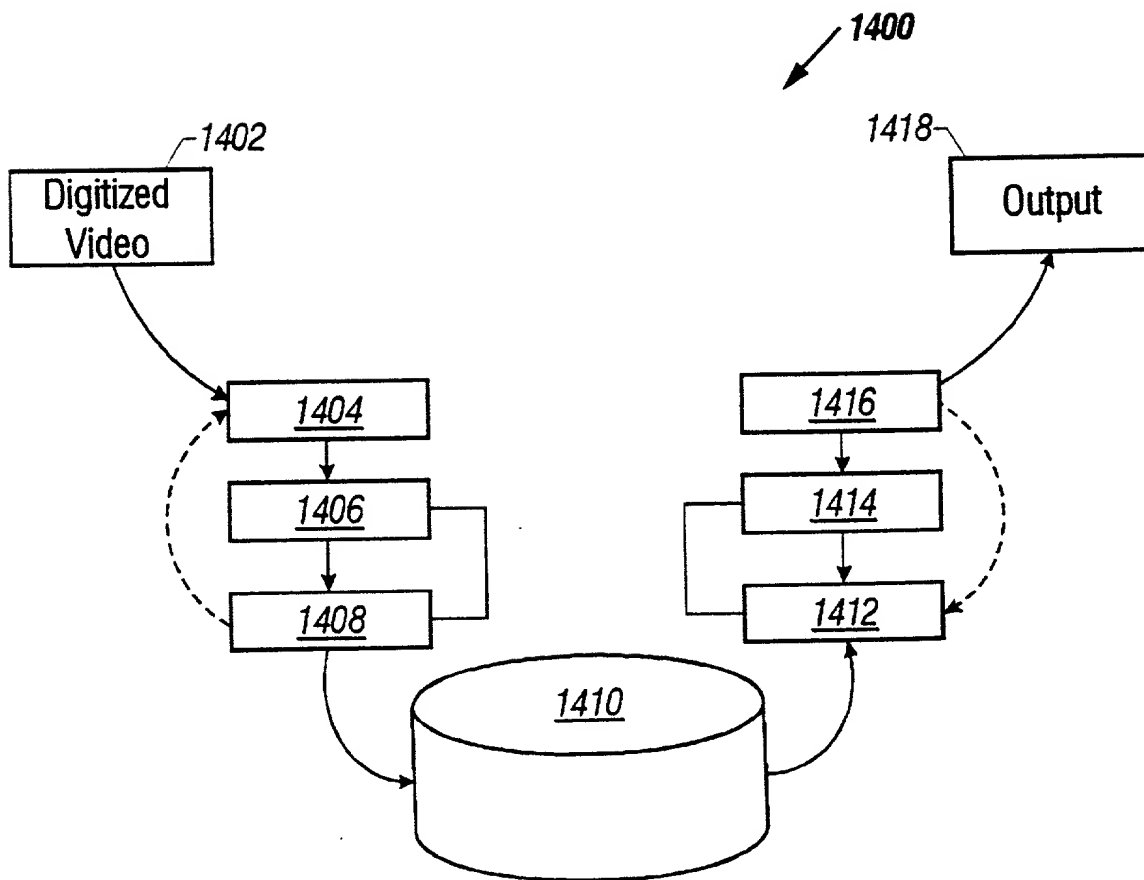


FIG. 14

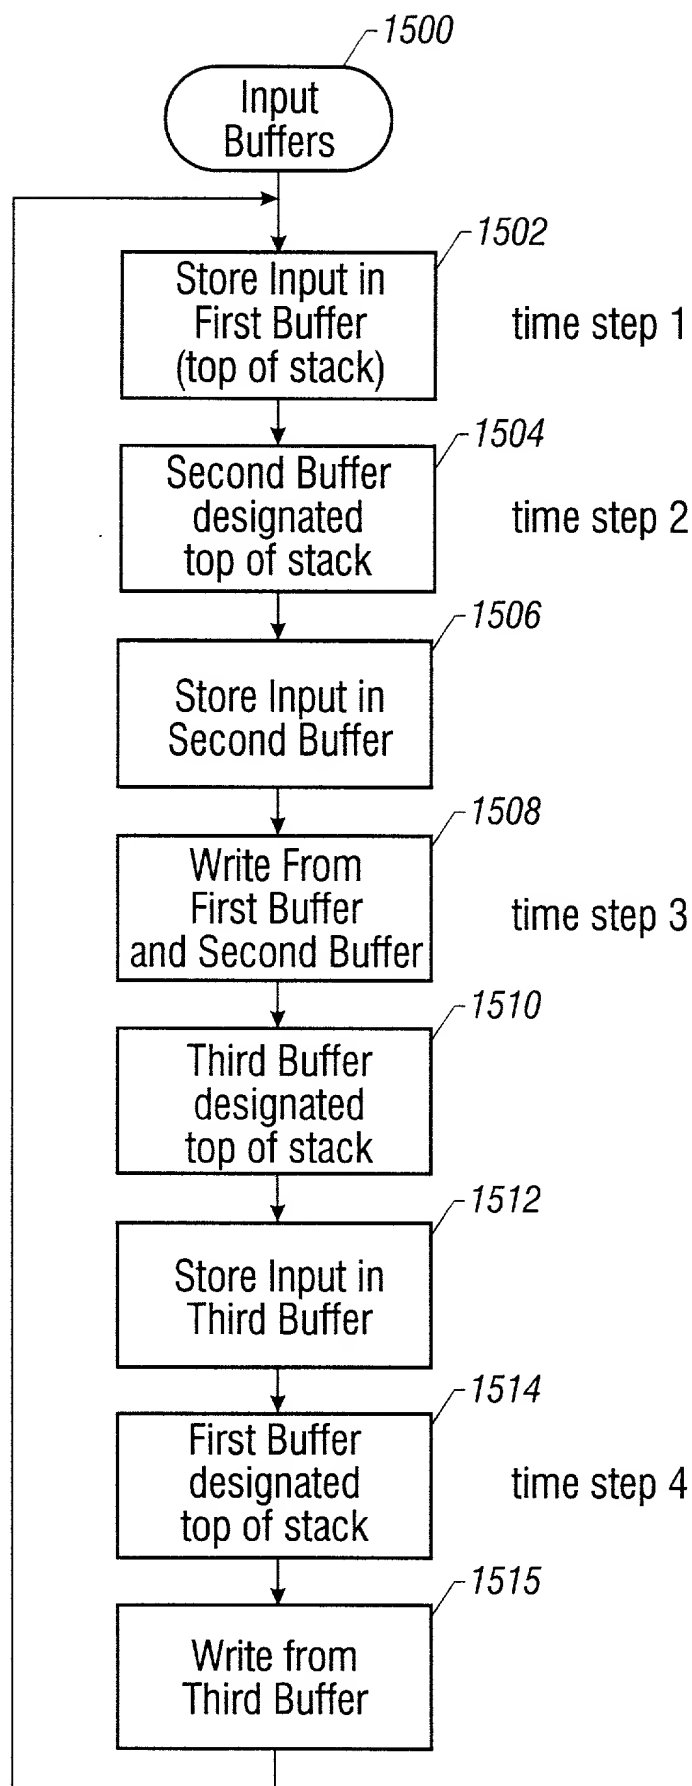


FIG. 15


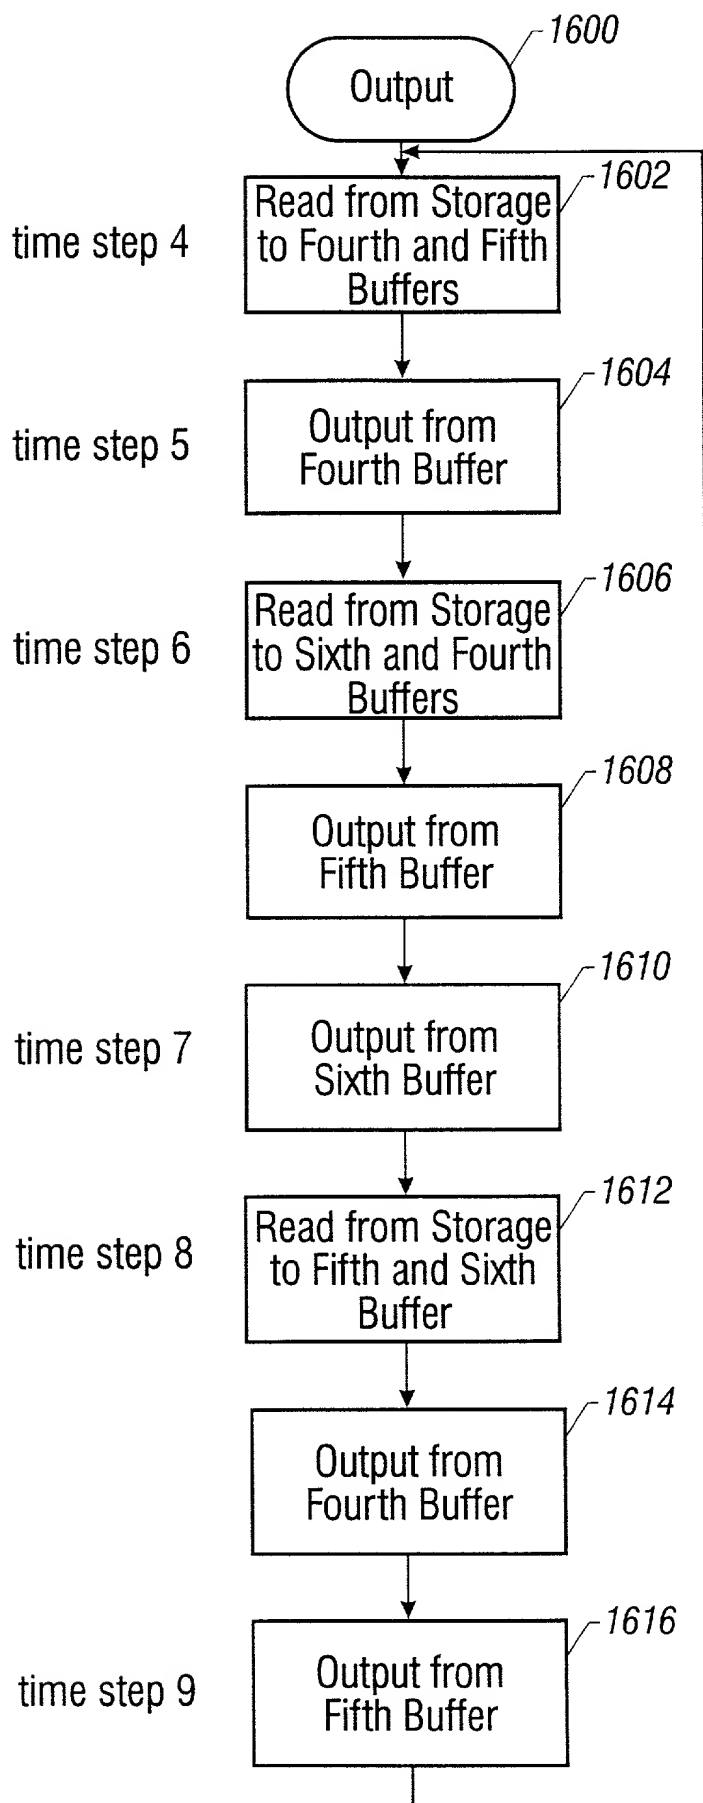


FIG. 16

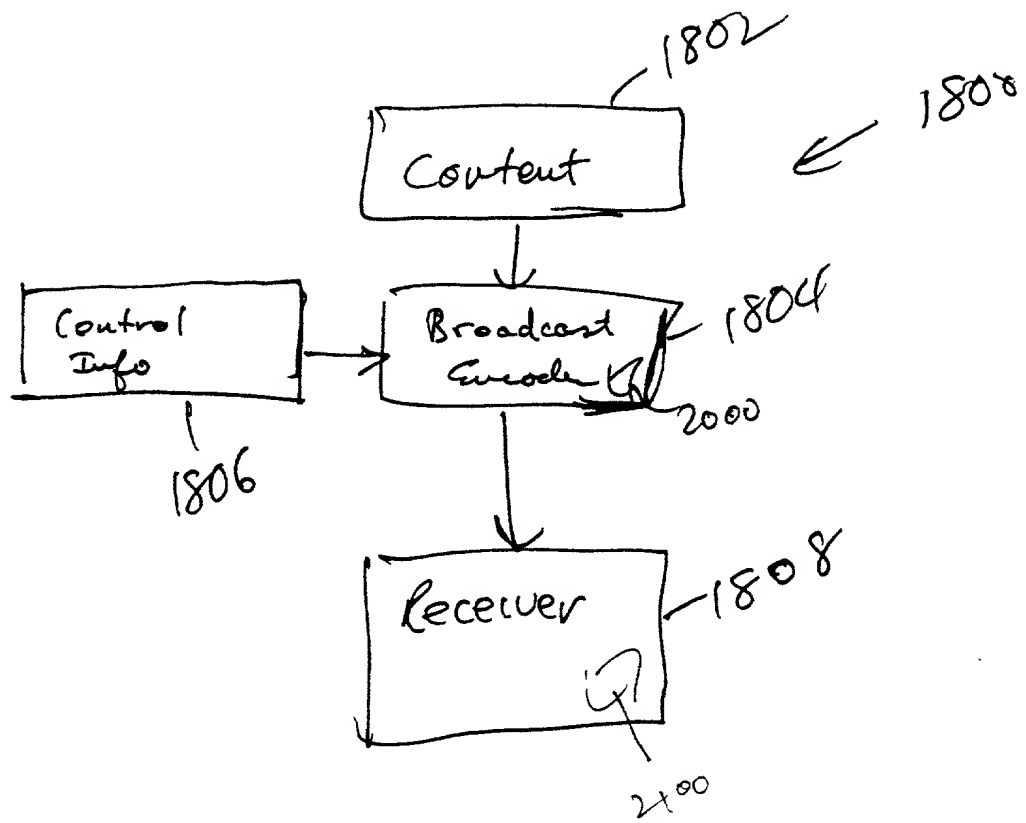

AG 18

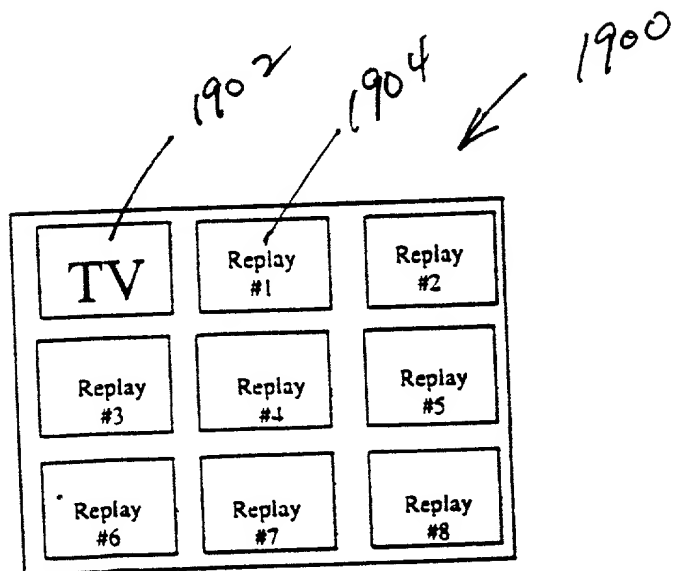


Fig 19

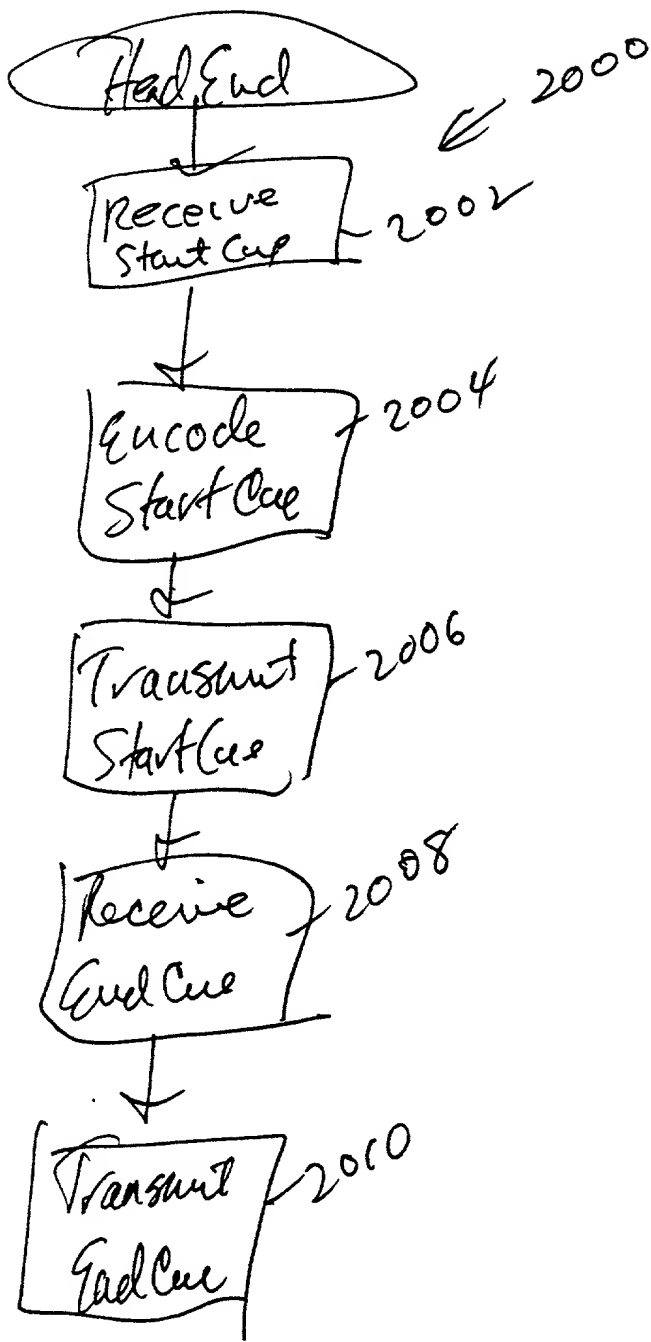


Fig 20

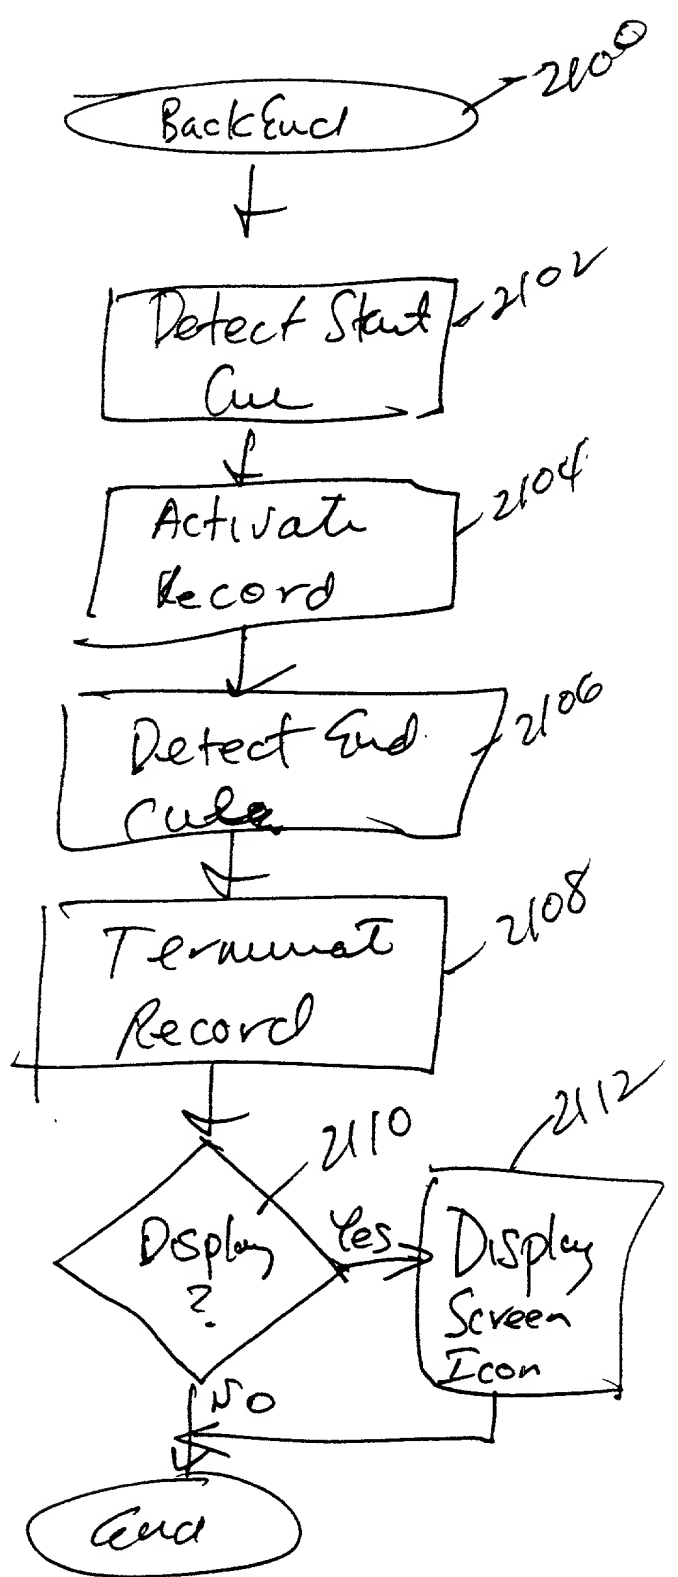


Fig 21

Attorney's Docket No.: INTL-0134-US (P6499)

PATENT

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**TIME SHIFTING BY SIMULTANEOUSLY RECORDING
AND PLAYING A DATA STREAM**

the specification of which

■

is attached hereto.

was filed on _____ as

United States Application Number _____

or PCT International Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			Priority Claimed	
Number	(Country)	(Day/Month/Year Filed)	Yes	No
Number	(Country)	(Day/Month/Year Filed)	Yes	No

Number	(Country)	(Day/Month/Year Filed)	Yes	No
--------	-----------	------------------------	-----	----

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

08/996,535	12/23/1997	Pending
(Application Number)	Filing Date	(Status-patented, pending, abandoned)
09/150,577	9/10/98	Pending
(Application Number)	Filing Date	(Status-patented, pending, abandoned)





I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, Dan C. Hu, 40,025; Coe F. Miles, Reg. No. 38,559, my patent attorneys, of TROP, PRUNER, HU & MILES, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and Joseph R. Bond, Reg. No. 36,458; Richard C. Calderwood, Reg. No. 35,468; Sean Fitzgerald, Reg. No. 32,027; David J. Kaplan, Reg. No. 41,105; Leo V. Novakoski, Reg. No. 37,198; Naomi Obinata, Reg. No. 39,320; Thomas C. Reynolds, Reg. No. 32,488; Steven P. Skabrat, Reg. No. 36,279; Howard A. Skaist, Reg. No. 36,008; Steven C. Stewart, Reg. No. 33,555; Raymond J. Werner, Reg. No. 34,752; and Charles K. Young, Reg. No. 39,425; my patent attorneys, of INTEL CORPORATION; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Timothy N. Trop, TROP, PRUNER, HU & MILES, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Timothy N. Trop, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


DEC-29-1998 10:37 FROM INTEL AZ PSD ENGINEERING TO 91713468883
DEC-29-98 TUE 11:08 AM TROP, PRUNER, HU & MILES FAX NO. 113468883

P. 04/08
P. 04

Full Name of Sole/First Inventor: Dennis M. O'Connor	
Inventor's Signature: 	Date: Dec. 29, 1998
Residence: 12130 E. Via De Palmas, Chandler, Arizona 85249	Citizenship: U.S.
Post Office Address: 12130 E. Via De Palmas, Chandler, Arizona 85249	
Full Name of Second/Joint Inventor: Mark P. Chuang	
Inventor's Signature: 	Date: 12/29/98
Residence: 10367 Somerset Court, Cupertino, California 95014	Citizenship: U.S.
Post Office Address: 10367 Somerset Court, Cupertino, California 95014	
Full Name of Third/Joint Inventor: Thomas S. Martin	
Inventor's Signature: 	Date: 12/17/98
Residence: 4542 W. Dublin St., Chandler, AZ 85226	Citizenship: Indian
Post Office Address: 4542 W. Dublin St., Chandler, AZ 85226	
Full Name of Fourth/Joint Inventor: Mark L. Gordon	
Inventor's Signature: 	Date: 12/10/98
Residence: 18 W. Myrna Lane, Tempe, AZ 85284	Citizenship: U.S.
Post Office Address: 18 W. Myrna Lane, Tempe, AZ 85284	

DEC-29-1998 10:37 FROM INTEL AZ PSD ENGINEERING TO 917134688883
DEC-29-98 10:37 FROM INTEL AZ PSD ENGINEERING TO 917134688883

P. 05
P. 05

Full Name of Fourth/Joint Inventor: John J. Kirby	
Inventor's Signature: 	Date: 12/30/98
Residence: 547 NE Royal Court, Portland, OR 97232	Citizenship: U.S.
Post Office Address: 547 NE Royal Court, Portland, OR 97232	

060621 9158260

4

DEC-29-1998 10:10

7134688883

96%

P.05